



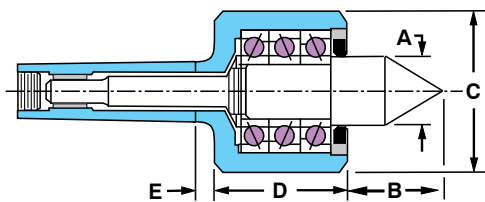


## Advantage Live Centers Standard, Tracer and Long Point


- Accuracy guaranteed to  $\pm .00005$
- Four bearing design for superior performance
- Points are through-hardened to 61-63 Rc
- Full-length spindle for extra rigidity
- Less tailstock pressure required
- Body heat-treated for additional strength
- Riten full service and repair

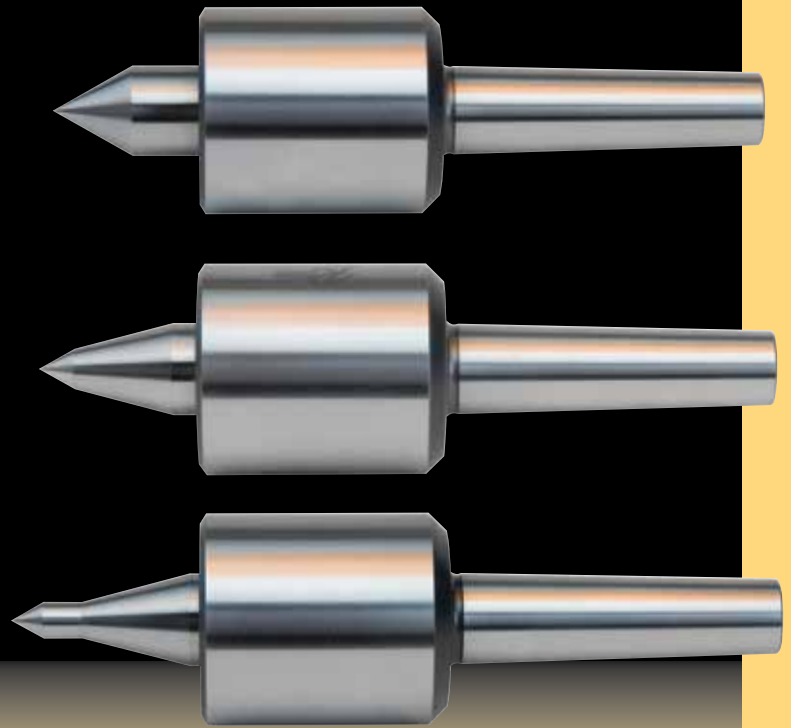

Standard Point

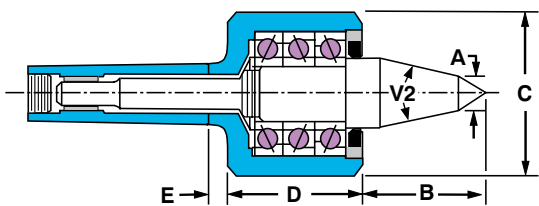

Tracer Point

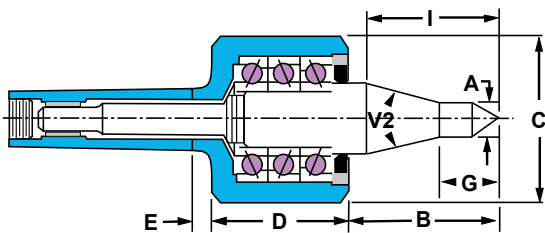

Long Point

### STANDARD POINT - MORSE TAPER

Model	MT	A	B	C	D	E	Max. RPM	W. P. Weight
51602	2	0.87	1.12	1.75	2.37	0.38	5000	880
51603	3	0.87	1.12	1.75	2.37	0.38	5000	920
51604	4	1.26	2.00	2.88	3.32	0.38	5000	2200
51605	5	1.26	2.00	2.88	3.32	0.38	5000	4400
51606	6	1.87	2.25	3.77	3.84	0.50	4000	8000

### TRACER POINT - MORSE TAPER

Model	MT	A	B	C	D	E	V2	Max. RPM	W. P. Weight
51902	2	0.38	1.75	1.75	2.37	0.38	30°	5000	750
51903	3	0.38	1.75	1.75	2.37	0.38	30°	5000	750
51904	4	0.56	2.13	2.88	3.32	0.38	30°	5000	1700
51905	5	0.56	2.13	2.88	3.32	0.38	30°	5000	1700
51906	6	0.63	2.78	3.77	3.84	0.50	30°	4000	2200

### LONG POINT - MORSE TAPER

Model	MT	A	B	C	D	E	G	V2	I	Max. RPM	W. P. Weight
51102	2	0.38	2.00	1.75	2.37	0.38	0.75	30°	1.67	5000	310
51103	3	0.38	2.00	1.75	2.37	0.38	0.75	30°	1.67	5000	310
51104	4	0.50	2.50	2.88	3.32	0.38	0.94	30°	2.35	5500	1100
51105	5	0.50	2.50	2.88	3.32	0.38	0.94	30°	2.35	5500	1100