



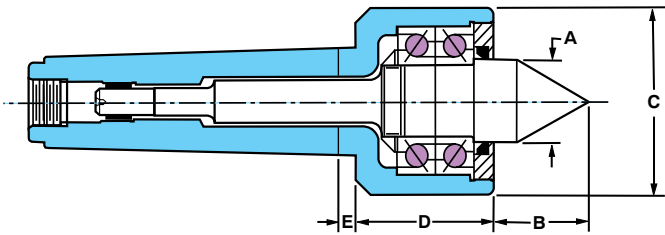


Regal Live Centers Standard and Long Point

- Accuracy guaranteed to $\pm .00005$
- Points are through-hardened to 61-63 Rc
- Full-length spindle for extra rigidity
- Two angular contact bearings for superior performance in a compact design
- Body heat-treated for additional strength
- Long point configuration allows for tool clearance

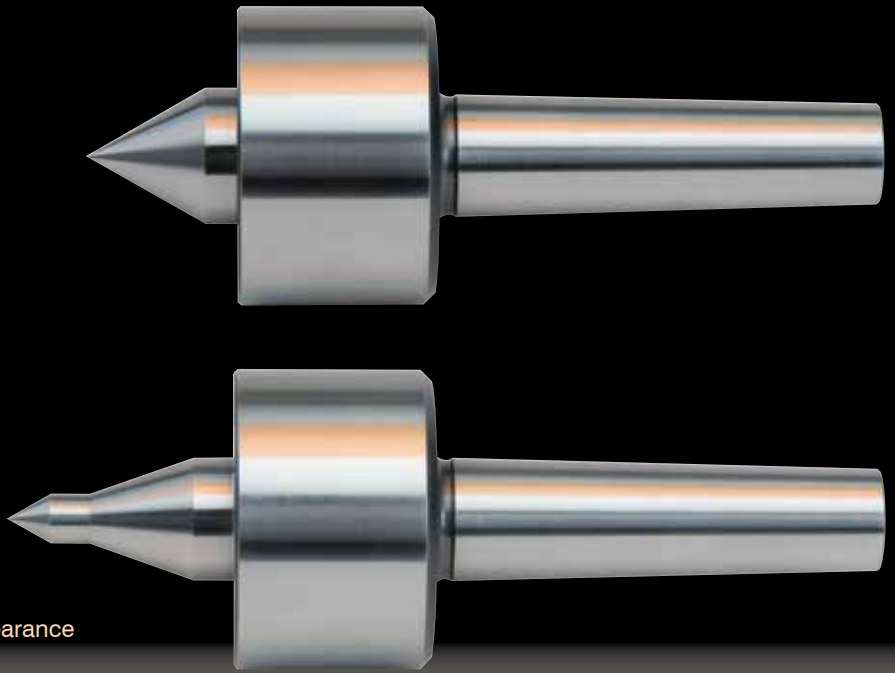

Standard Point

STANDARD POINT - MORSE TAPER									
Model	MT	A	B	C	D	E	Max. RPM	W. P.	Weight
48602	2	1.00	1.25	2.37	1.75	0.25	4000	440	
48603	3	1.00	1.25	2.37	1.75	0.25	4000	1100	
48604	4	1.38	1.50	3.00	1.97	0.38	4000	2100	
48605	5	1.38	1.82	3.07	2.09	0.30	4000	2800	

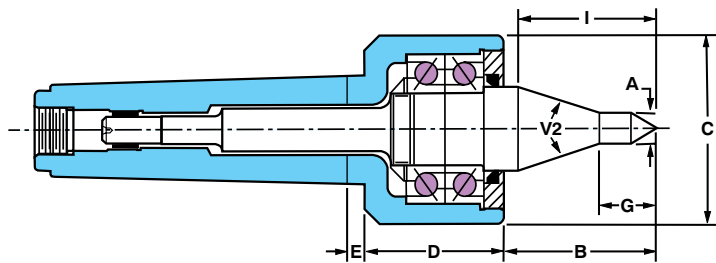

Long Point

LONG POINT - MORSE TAPER												
Model	MT	A	B	C	D	E	G	V2	I	Max. RPM	W. P.	Weight
48102	2	0.38	1.88	2.37	1.75	0.25	0.64	40°	1.50	4000	310	
48103	3	0.38	1.88	2.37	1.75	0.25	0.64	40°	1.50	4000	310	
48104	4	0.50	2.22	3.00	1.97	0.38	0.81	40°	1.82	4000	1100	
48105	5	0.50	2.50	3.07	2.09	0.30	0.94	40°	2.15	4000	1100	