




Light and Extra-Light Live Centers

- Accuracy guaranteed to $\pm .00005$.
- Light live center designed for 2 to 10 lb. workpiece loads.
- X-Light live center designed for extremely light workpiece loads – 2 oz. to 2 lb.
- Excellent for very small workpieces. Used in medical, orthopedic, aerospace and similar applications.
- Free turning.
- Maximum 8,000 RPM.




Extra-Light Live Center and quarter shown actual size

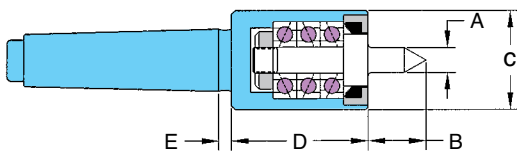

Maximum axial load: 500 lbs.

LIGHT LIVE CENTER - MORSE TAPER									
Model	Taper	A	B	C	D	E	Max RPM	W. P. Weight	
40552	2	0.38	0.87	1.50	2.06	0.19	8000	10	
40572	2	0.78	1.13	1.50	2.06	0.19	8000	10	
40553	3	0.38	0.87	1.50	2.06	0.19	8000	10	
40573	3	0.78	1.13	1.50	2.06	0.19	8000	10	
40554	4	0.38	0.87	1.50	2.06	0.19	8000	10	
40574	4	0.78	1.13	1.50	2.06	0.19	8000	10	
40555	5	0.38	0.87	1.50	2.06	0.19	8000	10	
40575	5	0.78	1.13	1.50	2.06	0.19	8000	10	

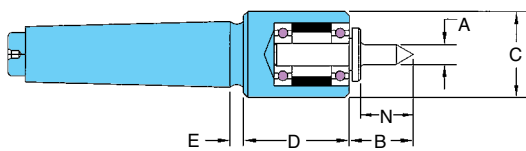

Maximum axial load: 100 lbs.

EXTRA-LIGHT LIVE CENTER - MORSE TAPER									
Model	Taper	A	B	C	D	E	N	Max RPM	W. P. Weight
40101	1	0.28	0.87	1.23	1.77	0.19	0.75	8000	2
40102	2	0.28	0.87	1.23	1.77	0.19	0.75	8000	2
40103	3	0.28	0.87	1.23	1.77	0.19	0.75	8000	2
40104	4	0.28	0.87	1.23	1.77	0.19	0.75	8000	2