





Raptor Live Centers Standard and Tracer Point

- Accuracy guaranteed to $\pm .0001$
- Tapered and ball bearings.
- Points are through-hardened to 61-63 Rc
- Riten full service and repair



Riten's Raptor Live Centers are designed specifically for gear hobbing, cutting and grinding. They are an ideal replacement for foreign-made "Gepys", with higher concentricity, lower cost of ownership, and greatly reduced lead times. Repairs are made in the U.S., with turnaround times as little as two weeks.

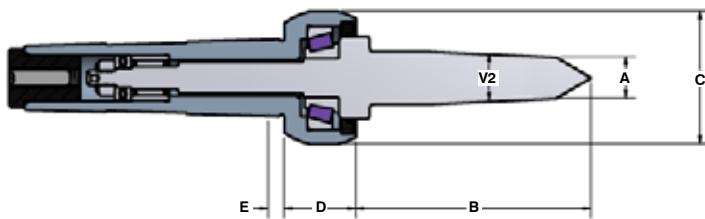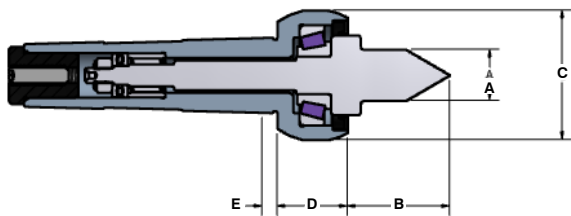

STANDARD POINT - MORSE TAPER

Model	Taper	A	B	C	D	E	W. P. Weight
42603	3	0.63	1.28	1.63	0.91	0.19	250
42604	4	0.88	1.56	2.00	1.09	0.38	250

TRACER POINT - MORSE TAPER

Model	Taper	A	B	C	D	E	V2	W. P. Weight
42903	3	0.50	2.88	1.63	0.91	0.19	5°	250
42904	4	0.72	3.06	2.00	1.09	0.38	5°	250

Estimated Max RPM - 3000