





CNC High RPM Sprint Live Centers

Standard, Tracer and Long Point


- Accuracy guaranteed to $\pm .00004$
- The largest, toughest bearing set available in centers of this size
- Coolant deflectors for additional protection from contamination
- Points through-hardened to 61-63 Rc
- Body heat-treated for additional strength
- Riten full service and repair

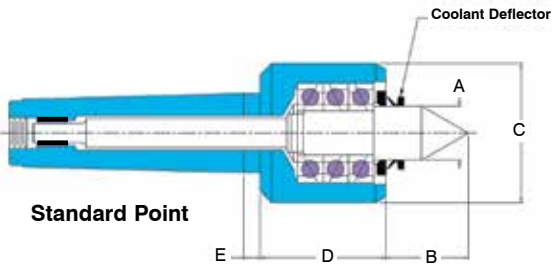

| STANDARD POINT - MORSE TAPER | | | | | | | | | |
|------------------------------|----|------|------|------|------|------|----------|-------|--------|
| Model | MT | A | B | C | D | E | Max. RPM | W. P. | Weight |
| 14604 | 4 | 1.38 | 1.82 | 3.07 | 2.78 | 0.36 | 5000 | 2200 | |
| 14605 | 5 | 1.57 | 2.38 | 3.07 | 2.78 | 0.36 | 5000 | 5000 | |

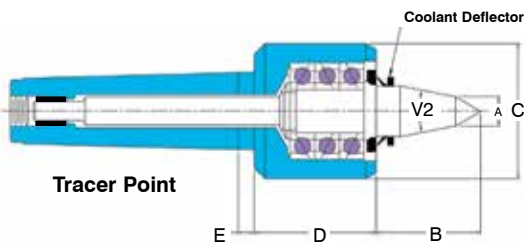

| TRACER POINT - MORSE TAPER | | | | | | | | | | |
|----------------------------|----|------|------|------|------|------|-----|----------|-------|--------|
| Model | MT | A | B | C | D | E | V2 | Max. RPM | W. P. | Weight |
| 14904 | 4 | 0.56 | 2.25 | 3.07 | 2.78 | 0.36 | 40° | 5000 | 1700 | |
| 14905 | 5 | 0.56 | 2.25 | 3.07 | 2.78 | 0.36 | 40° | 5000 | 1700 | |

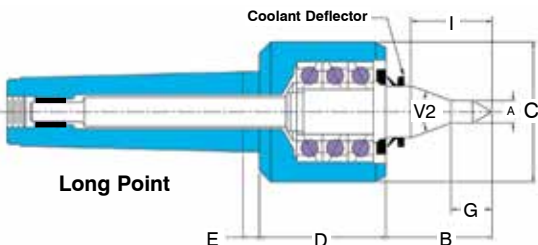

| LONG POINT - MORSE TAPER | | | | | | | | | | | | |
|--------------------------|----|------|------|------|------|------|-----|-----|------|----------|-------|--------|
| Model | MT | A | B | C | D | E | G | V2 | I | Max. RPM | W. P. | Weight |
| 14104 | 4 | 0.50 | 2.63 | 3.07 | 2.78 | 0.36 | .75 | 40° | 1.96 | 5000 | 1100 | |
| 14105 | 5 | 0.50 | 2.63 | 3.07 | 2.78 | 0.36 | .75 | 40° | 1.96 | 5000 | 1100 | |