




Low Profile Live Centers


Standard, Tracer and Long Point

- Accuracy guaranteed to $\pm .0002$
- Small housing diameter provides tool clearance
- Points are through-hardened to 61-63 Rc
- Full-length spindle for extra rigidity
- Less tailstock pressure required
- Body heat-treated for additional strength
- Riten full service and repair

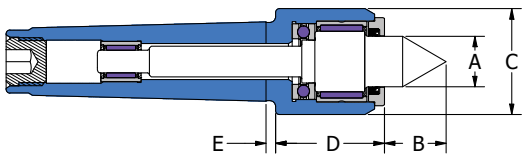


Standard Point

STANDARD POINT – MORSE TAPER								
Model	MT	A	B	C	D	E	Max. RPM	W. P. Weight
87602	2	0.59	0.77	1.34	1.42	0.25	5000	200
87603	3	0.59	0.77	1.34	1.42	0.25	5000	400
87604	4	0.79	0.97	1.65	1.70	0.31	4500	800
87605	5	1.18	1.46	2.28	2.34	0.38	4300	1600

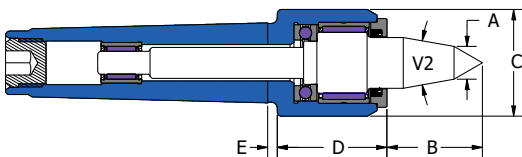

Tracer Point

TRACER POINT – MORSE TAPER									
Model	MT	A	B	C	D	E	V2	Max. RPM	W. P. Weight
87902	2	0.39	1.26	1.34	1.42	0.25	20°	5000	170
87903	3	0.39	1.26	1.34	1.42	0.25	20°	5000	340
87904	4	0.51	1.48	1.65	1.70	0.31	20°	4500	700
87905	5	0.55	2.03	2.28	2.34	0.38	30°	4300	1400

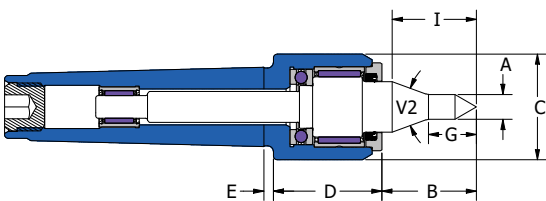

Long Point

LONG POINT - MORSE TAPER											
Model	MT	A	B	C	D	E	G	V2	I	Max. RPM	W. P. Weight
87102	2	0.31	1.26	1.34	1.42	0.25	0.63	40°	1.02	5000	50
87103	3	0.31	1.26	1.34	1.42	0.25	0.63	40°	1.02	5000	50
87104	4	0.39	1.48	1.65	1.70	0.31	0.75	40°	1.32	4500	150
87105	5	0.47	2.03	2.38	2.34	0.38	1.00	40°	2.00	4300	180