



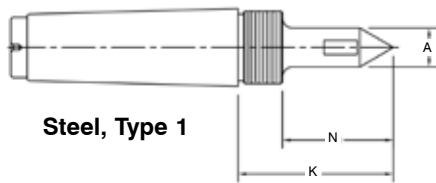


CNC Dead Centers

Steel and Carbide Tipped

- Accuracy guaranteed to $\pm .00005$
- Through-hardened to 61-63 Rc
- Meets the rigid requirements of CNC turning
- All stock items
- Riten full service and repair

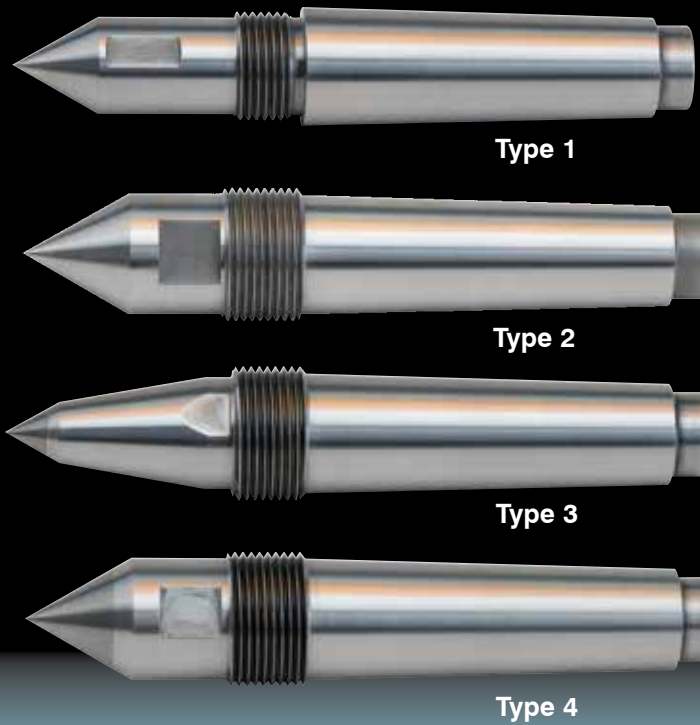


Steel, Type 1

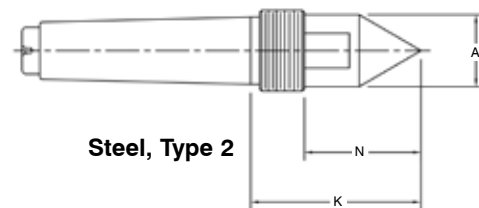


Steel, Type 2

STEEL, TYPE 1, MORSE TAPER						
Model	MT	A	N	K	Threads	Nut
68102	2	0.38	1.25	1.69	7/8 - 14	81031
68113	3	0.38	1.25	1.69	7/8 - 14	81031
68103	3	0.50	2.00	2.44	7/8 - 14	81031
68123	3	0.75	2.00	2.44	7/8 - 14	81031
68114	4	0.50	2.00	2.63	11/8 - 12	81041
68104	4	0.63	2.25	2.88	11/8 - 12	81041
68124	4	1.00	2.25	2.88	11/8 - 12	81041
68115	5	0.50	2.00	2.95	15/8 - 12	81051
68105	5	0.88	2.50	3.44	15/8 - 12	81051
68125	5	1.25	2.50	3.44	15/8 - 12	81051
68106	6	1.75	3.69	5.26	2 1/2 - 12	86061

STEEL, TYPE 2, MORSE TAPER						
Model	MT	A	N	K	Threads	Nut
68603	3	1.00	1.63	2.37	11/8 - 12	81041
68604	4	1.25	2.03	2.94	13/8 - 12	86041
68605	5	1.75	2.46	3.62	17/8 - 12	86051
68606	6	2.25	3.69	5.25	2 1/2 - 12	86061

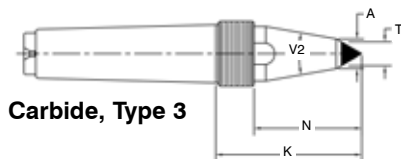

Carbide, Type 3

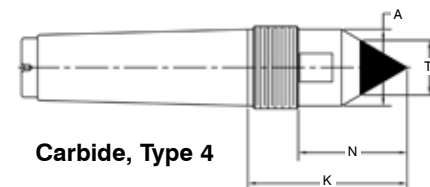

Carbide, Type 4

CARBIDE TIPPED, TYPE 3, MORSE TAPER								
Model	MT	T	A	N	K	V2	Threads	Nut
68923	3	0.38	0.50	2.00	2.62	20°	11/8 - 12	81041
68924	4	0.50	0.63	2.28	3.09	20°	13/8 - 12	86041
68925	5	0.50	0.63	2.50	3.44	20°	15/8 - 12	81051

CARBIDE TIPPED, TYPE 4, MORSE TAPER								
Model	MT	T	A	N	K	Threads	Nut	
68913	3	0.75	1.00	1.62	2.37	11/8 - 12	81041	
68914	4	1.00	1.25	2.02	2.93	13/8 - 12	86041	
68915	5	1.25	1.75	2.50	3.66	17/8 - 12	86051	